

**SEMI AUTOMATIC**

# *Rotoplat 708 HP*

SEMI-AUTOMATIC TURNTABLE STRETCH WRAPPING MACHINE

*TECHNOLOGY AT THE SERVICE  
OF THE USABILITY*



**STANDARD ON THE MACHINE**

With multi-level variable prestretch ensures the best film economy for every load. Guarantees the highest containment and best film economy from any stretch film. Adjustable pre-stretch up to 9 times on each load. Strategic film placement allows the film to be placed exactly where it has the most impact on load stability and containment.





# Rotoplat 708 HP

- EASY LOADING WITH FORKLIFT TRUCK
- IDEAL FOR BAGGED PRODUCT. THE DESIGN ALLOWS PRODUCT TO FALL ONTO THE FLOOR INSTEAD OF UNDER THE ENCLOSED TURNTABLE
- FILM CARRIAGE TRAVELS DOWN TO CAPTURE LOAD TO THE PALLET
- HEAVY DUTY DESIGN WITH A 5,500 LB WEIGHT CAPACITY
- IDEAL FOR CONCRETE BLOCK AND BRICK INDUSTRY



## TECHNICAL FEATURES

| MACHINE                    | ROTOPLAT 708 HP                                                                                              |       |
|----------------------------|--------------------------------------------------------------------------------------------------------------|-------|
| PERFORMANCE                |                                                                                                              |       |
| Production speed           | Up to 15/20                                                                                                  | (LPH) |
| Turntable speed            | 5-12                                                                                                         | (rpm) |
| Turntable drive            | 1 HP                                                                                                         | (VAC) |
| LOAD HANDLING              |                                                                                                              |       |
| Turntable size             | Ø 65 plated steel                                                                                            | (in)  |
| Maximum load height        | 110                                                                                                          | (in)  |
| Minimum load weight        | 5.500                                                                                                        | (lbs) |
| FILM DELIVERY SYSTEM       |                                                                                                              |       |
| Film delivery system       | Power variable stretch                                                                                       |       |
| Standard pre-stretch       | Variable to 400% with up to 9 different levels per load                                                      |       |
| Containment force          | Variable electronic with up to 9 different levels per load                                                   |       |
| Corner compensation        | Load cell                                                                                                    |       |
| Roll carriage speed        | Variable up and down                                                                                         |       |
| Standard film width        | 20                                                                                                           | (in)  |
| Automatic film cut         | Option                                                                                                       |       |
| Load Height Detection      | Infrared photocell detects dark, clear and reflective products.<br>Eliminates false reading on gaps in loads |       |
| SAFETY FEATURES            |                                                                                                              |       |
| Roll carriage safety stop  | STD                                                                                                          |       |
| CE compliant               | Yes                                                                                                          |       |
| Anti-fall device           | STD                                                                                                          |       |
| Lock-Out/Tag-Out Compliant | Yes                                                                                                          |       |
| ADDITIONAL FEATURES        |                                                                                                              |       |
| Forklift portable          | Front and rear                                                                                               |       |
| SERVICE REQUIREMENTS       |                                                                                                              |       |
| Electric                   | 110VAC/1ph/60Hz (+/-10%)                                                                                     | (VAC) |
| NEMA 12 enclosure          | STD                                                                                                          |       |
| Warranty                   | 5 years                                                                                                      |       |

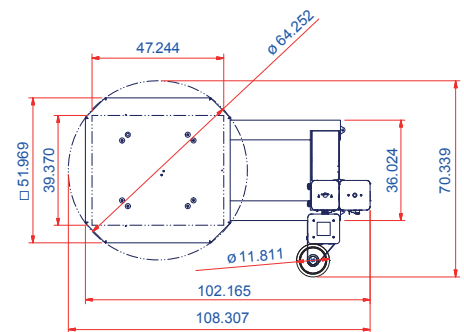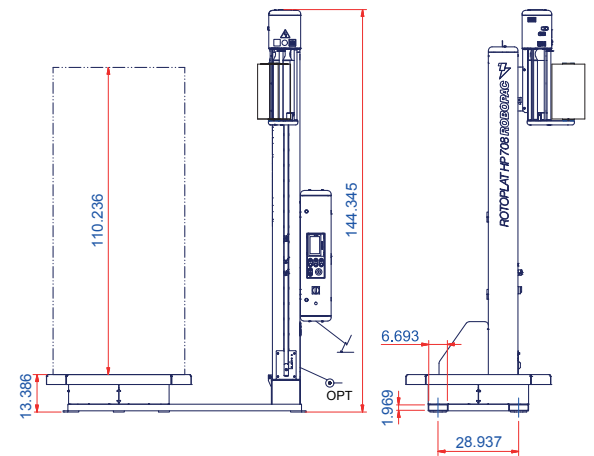

**ROBOPAC**  
Innovation driven by values

Smart Solutions. Even Smarter Machines.  
Innovation | Reliability | Service

www.robopacusa.com  
678.473.7896 x1212  
salesmgmt@robopac.com

The contents of these catalogs have been verified before the press. Robopac reserves the right to modify in every moment the technical characteristics of the products and accessories illustrated in the present document.