

COMPACTA A

AUTOMATIC RING WRAPPER FOR SPIRAL WRAPPING AND BANDING WITH STRETCH FILM



ROBOPAC 

ROBOPAC

ROBOPAC, established in 1982, is world leader in the stretch film wrapping technology with a production of over 5,000 machines/year, 70% of which exported to the main world markets. Four technologies have been developed by the Company: robot, turntables and rotating arms for stretch film load stabilization (core business), stretch film horizontal wrapping machines for elongated products, shrink film packaging machines and taping machines. Thanks to a worldwide capillary distribution network and to the spare parts servicing centers present in our foreign affiliates, ROBOPAC ensures a quick and decisive after sales service.



AETNA GROUP





AETNA GROUP produces and sells on a worldwide basis stretch film wrapping machinery, bundlers, shrink film wrappers, cartoning and taping machines. The Group counts 460 employees of which 80 engaged in the After Sales Department. 94, 000 machines sold and installed worldwide with yearly sales of over 124 million dollars. Four production plants, three of which are in Italy, one in the Republic of San Marino, a joint venture in India, ROBOPAC PERKS, a network of over 460 Agents and Distribution and 5 foreign affiliates located in France, Great Britain, Germany, United States and the new AETNA GROUP VOSTOK in Moscow.

Since 1997 ROBOPAC is ISO 9001 certified and, since then, the company keeps investing in the improvement of its performances.

COMPACTA A

The Compacta series machines are built following high quality criteria and construction specifications that have been improved and refined through time. The high degree of satisfaction generated worldwide by the Compacta A series makes these machines the top preference of final users, which entrust their products to horizontal wrapping technology using stretch film. Thanks to a wide range of ring diameters this line of machines manufactured by ROBOPAC covers completely a broad range of wrapping needs. Compacta A is a machine that combines construction sturdiness with top-level automatic wrapping operations.






ROBOPAC's production range in packaging is based on the following types of machines:

 ROBOT	 ROTOPLAT	 COMPACTA	 SPIROR
Self-propelled robot	Turntable wrapping machines	Horizontal wrapping machines	Horizontal wrapping machines



COMPACTA A

AUTOMATIC RING WRAPPER FOR SPIRAL WRAPPING AND BANDING WITH STRETCH FILM

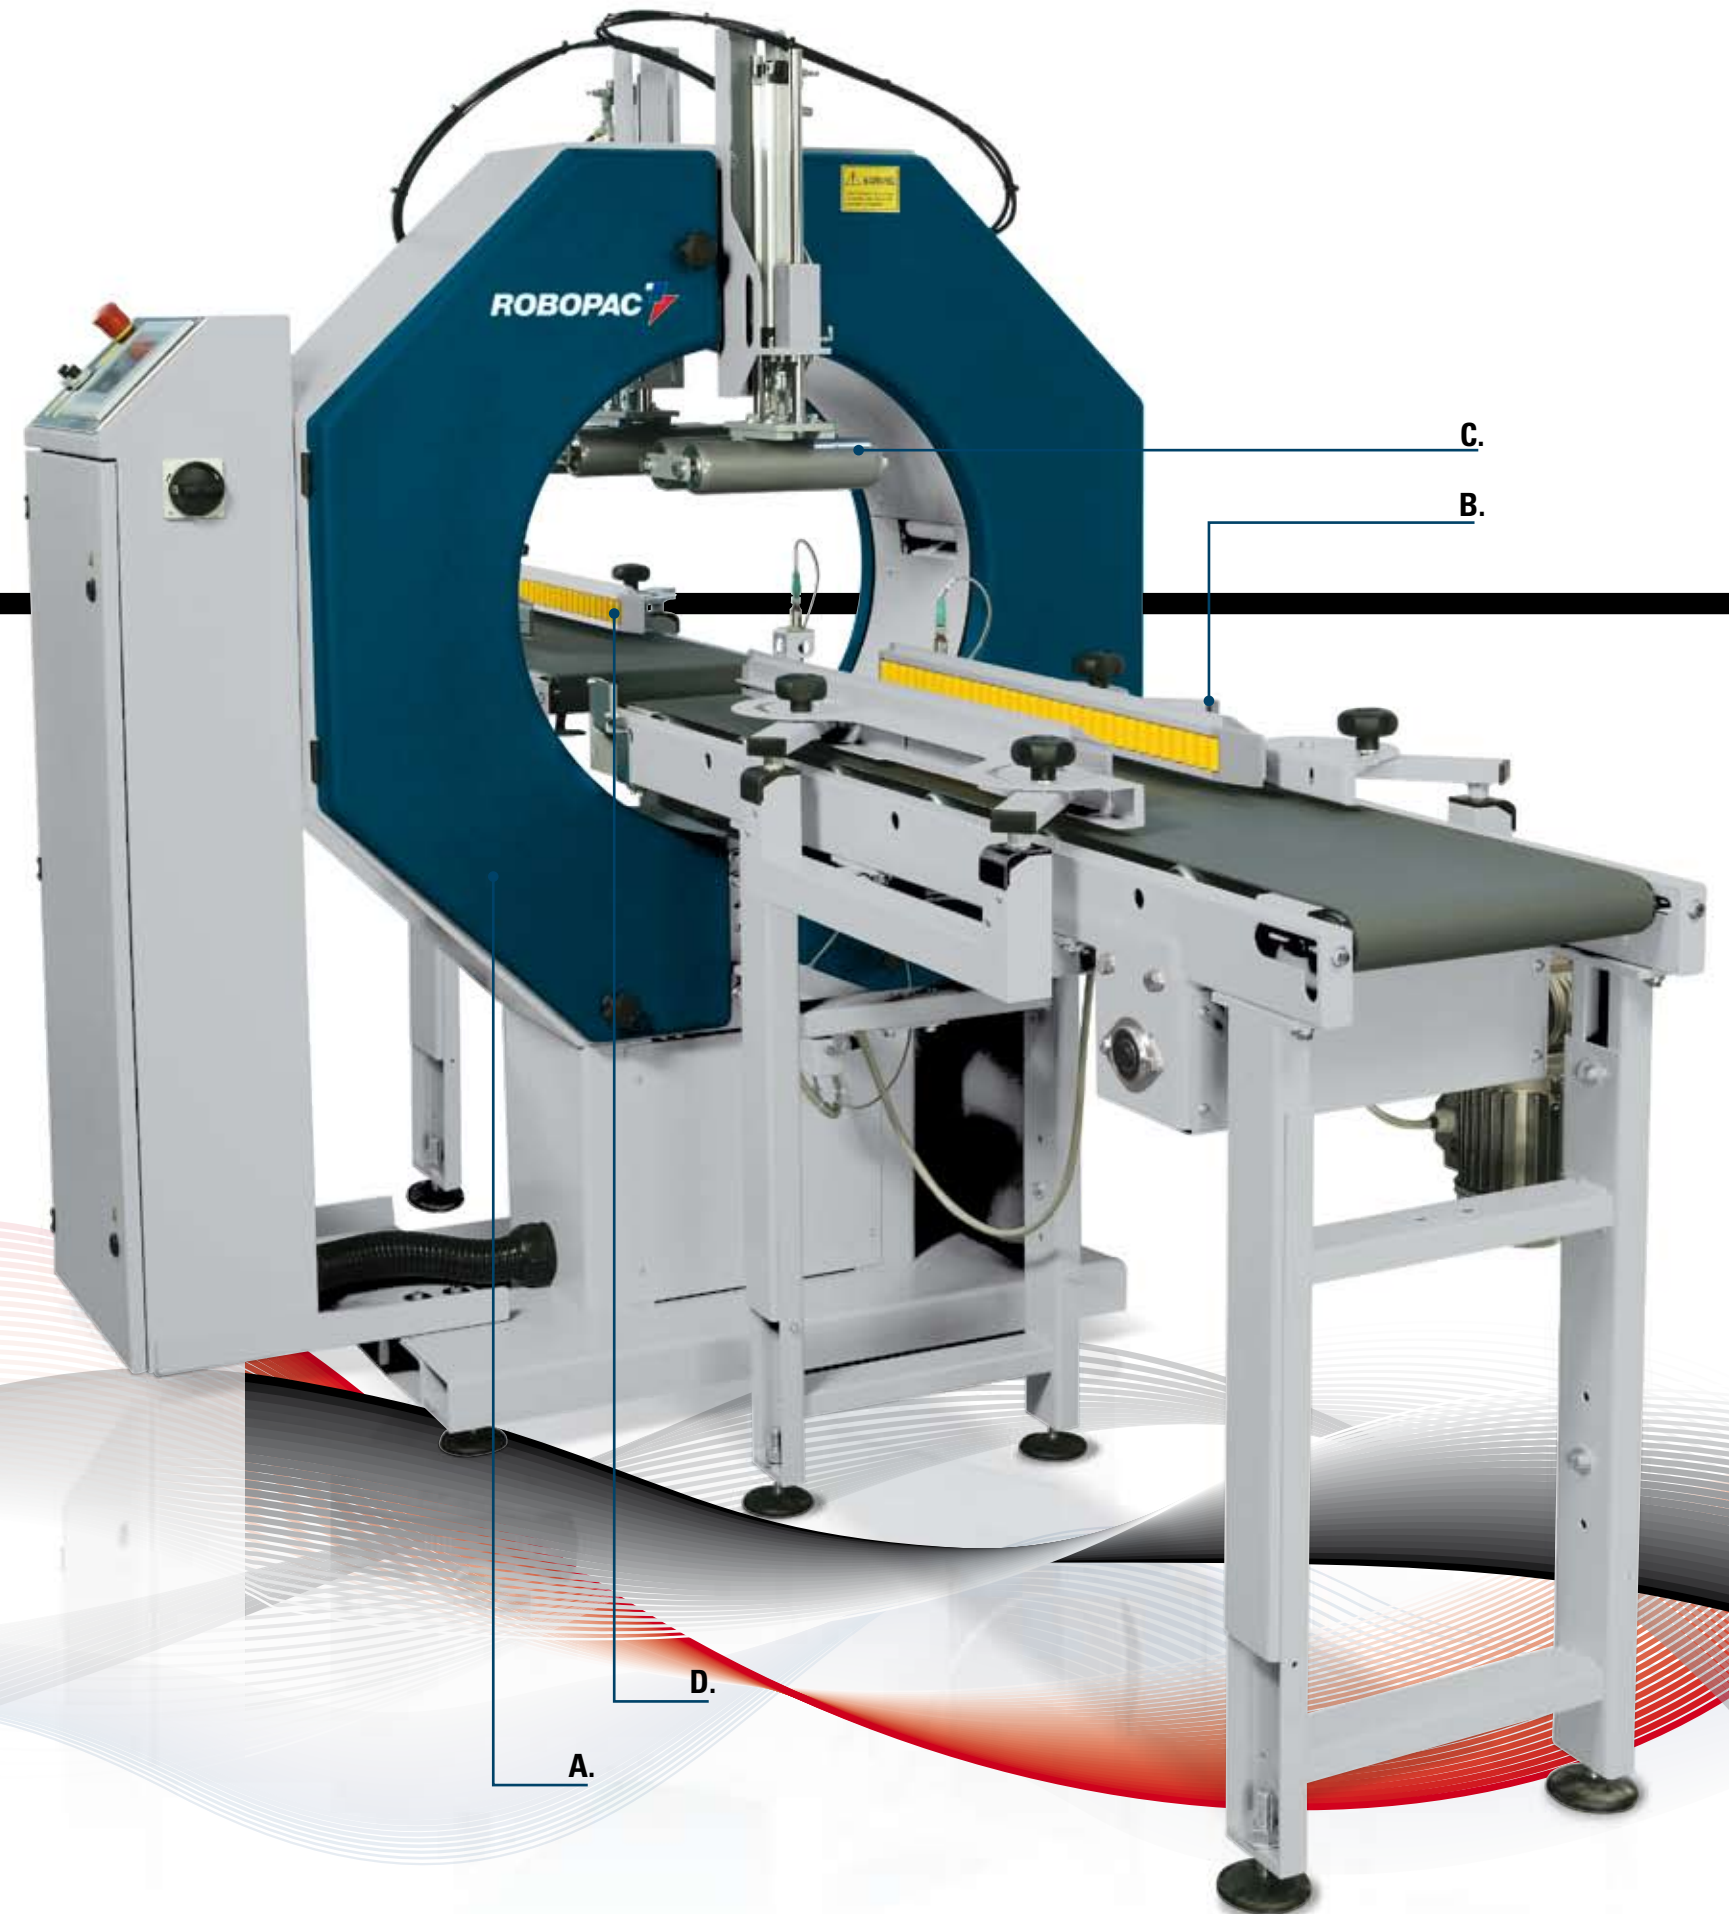

- A. FILM CARRIAGE
- B. MANUALLY ADJUSTABLE SIDE GUIDES
- C. PNEUMATIC TOP HOLD DOWN UNIT
- D. CUTTING AND CLAMPING UNIT

A.

D.

C.

B.



FILM CARRIAGE

The film carriage unit has an adjustable core break roller and it also has film reloading.



INFEED AND OUTFEED SIDE GUIDES

Infeed and outfeed side guides can be manually adjusted to better centre the products of different widths. This operation can be easily done using the available knobs. The product runs smoothly during the wrapping cycle thanks to the presence of idle rollers.



CUTTING AND CLAMPING UNIT

The highly reliable cutting and clamping system allows total automatic operation of the wrapping process.



FILM TENSIONING UNIT

The tensioning unit present in the 1200 version, guarantees optimal use of the film during the wrapping process. This feature is obtained using a mechanical dancer unit.

MAXIMUM SAFETY!



RING

The highly resistant rotating ring is supported by high-resistance polyamide resin rollers and it is built in single casting aluminum. This guarantees great strength and reliability of the circular motion.



INFEED AND OUTFEED PNEUMATICALLY OPERATING TOP PRESSURE UNITS

The vertical pressure units automatically settle in order to ensure a correct stabilisation of the product. The cylinder stroke can be adjusted manually to adjust the pressure on the products of different heights.



FILM SLOT

Total machine closure contributes to ensure maximum safety levels to the overall wrapping process.




CYCLE START AND EMERGENCY

Maximum control over the wrapping cycle is also achieved through the foot pedal and the emergency stop button that controls the start and the stop of the process. The operator maintains always an optimal safety distance.



HMI TOUCH SCREEN CONTROL PANEL
 In the A version, the controls and functions of the machine are managed by simply pressing the icons on the touch screen. The system makes the operator's job easier by following the wrapping process step-by-step.
 The electronics of the machine ensures maximum expandability and versatility.

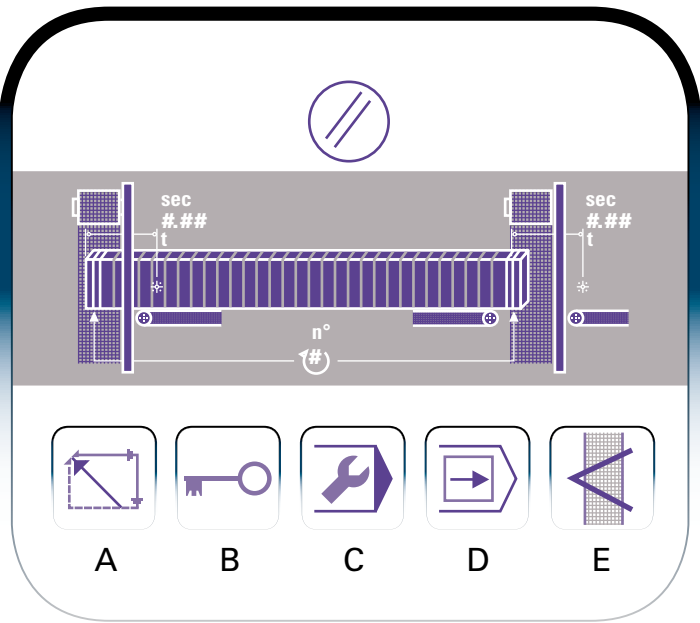

A. PROGRAM RESET
B. CONTROL BOARD LOCKOUT
C. WORK PARAMETERS
D. PRODUCTION DATA
E. CUTTING AND CLAMPING DURING FILM RELOADING

OUR PRODUCT RANGE



| COMPACTA 400



| COMPACTA 620




| COMPACTA 960




| COMPACTA 1200

COMPACTA 400-620-960-1200 A DIMENSIONS THAT CAN BE WORKED

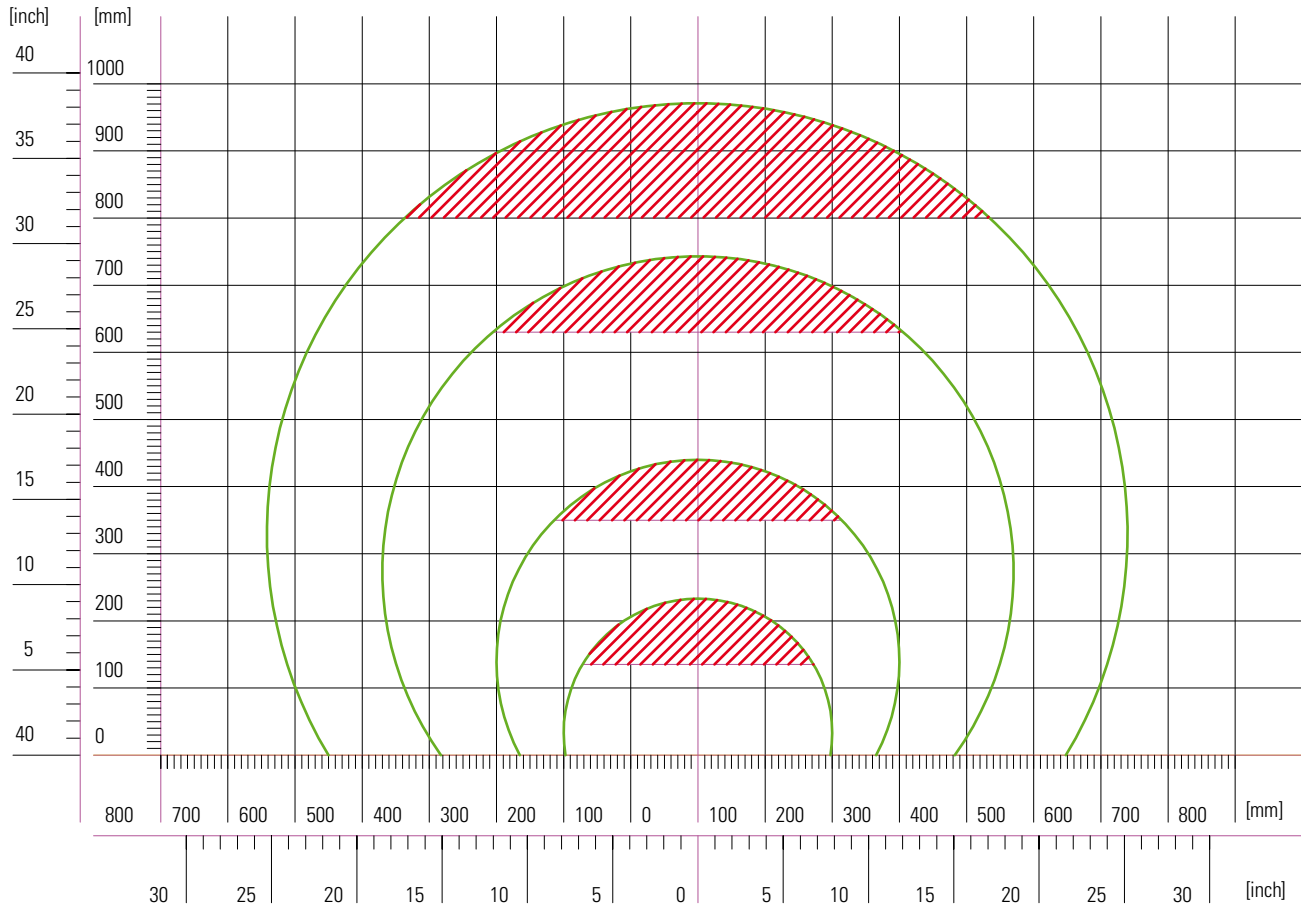

COMPACTA 400-620-960-1200 A OPTIMAL WRAPPING CONDITION

To achieve the best results while wrapping the product it is necessary that the centre of the Compacta rotating ring falls within the product profile as shown in the scheme. To do so all the Compacta Automatic machines feature the possibility to adjust the height of the conveyor.

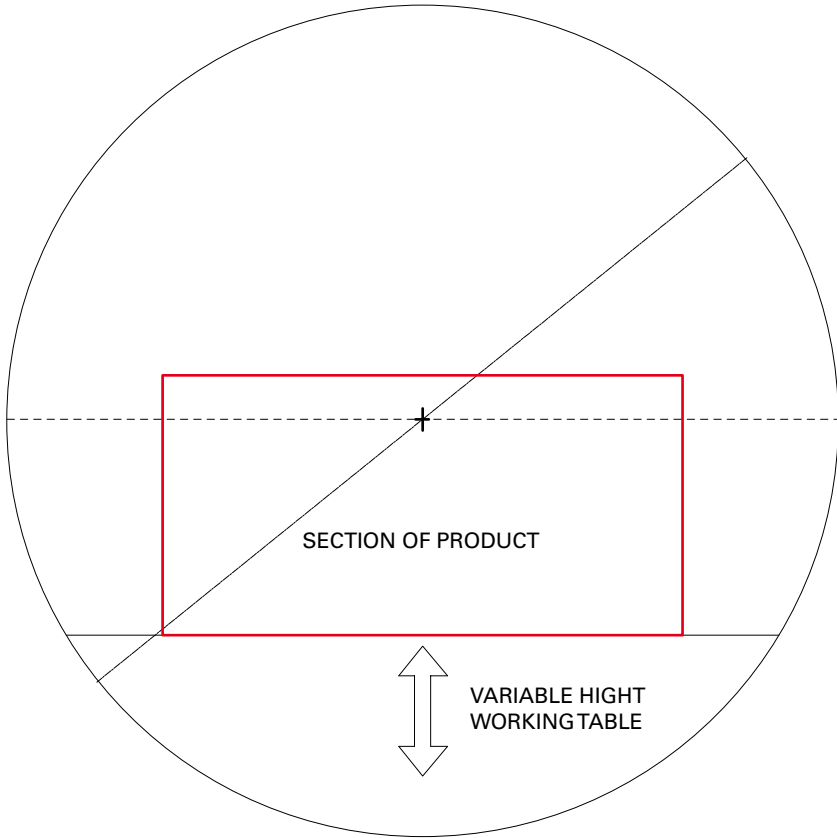


TECHNICAL FEATURES

MACHINE	COMPACTA 400 A	COMPACTA 620 A	COMPACTA 960 A	COMPACTA 1200 A
Ring size	15"	24"	38"	48"
Belt driven rotation unit	STD	STD	STD	STD
Max rotation speed	160 rpm	120 rpm	70 rpm	60 rpm
Fully automatic spiral wrapping cycle	STD	STD	STD	STD
Infeed and outfeed powered conveyors	STD	STD	STD	STD
Adjustable conveyors speed controlled by VFD (foot/min)	26÷55' /mi	19÷42' /mi	6÷26' /mi	16÷45' /mi
Product infeed and outfeed detecting photoeye	STD	STD	STD	STD
Manually adjustable side guides	STD	STD	STD	STD
Pneumatic infeed/ outfeed top hold down	STD	STD	STD	STD
Pneumatically operated film cutting and clamping unit	STD	STD	STD	STD
Constant film tensioning	STD	STD	STD	STD
Power supply voltage	STD	STD	STD	STD
Installed power	1.74 HP	1.74 HP	1.74 HP	2.54 HP
Working pressure 88 psi	x	x	x	x
Compressed air consumption/ cfm	0.56	0.56	0.56	1.06
FILM ROLL				
Film width	2/5"	2/5"	2/5"	2/5"
Max film roll	8"	8"	8"	10"
Core	x	x	x	x

MACHINE DIMENSIONS

MACHINE	COMPACTA 400 A	COMPACTA 620 A	COMPACTA 960 A	COMPACTA 1200 A
L	126"	126"	126"	133"
W	44"	50"	62"	93"
H	57"	67"	82"	86"
H'	34/35"	34/39"	34/40"	32/42"

COMPACTA 400-620-960-1200 A

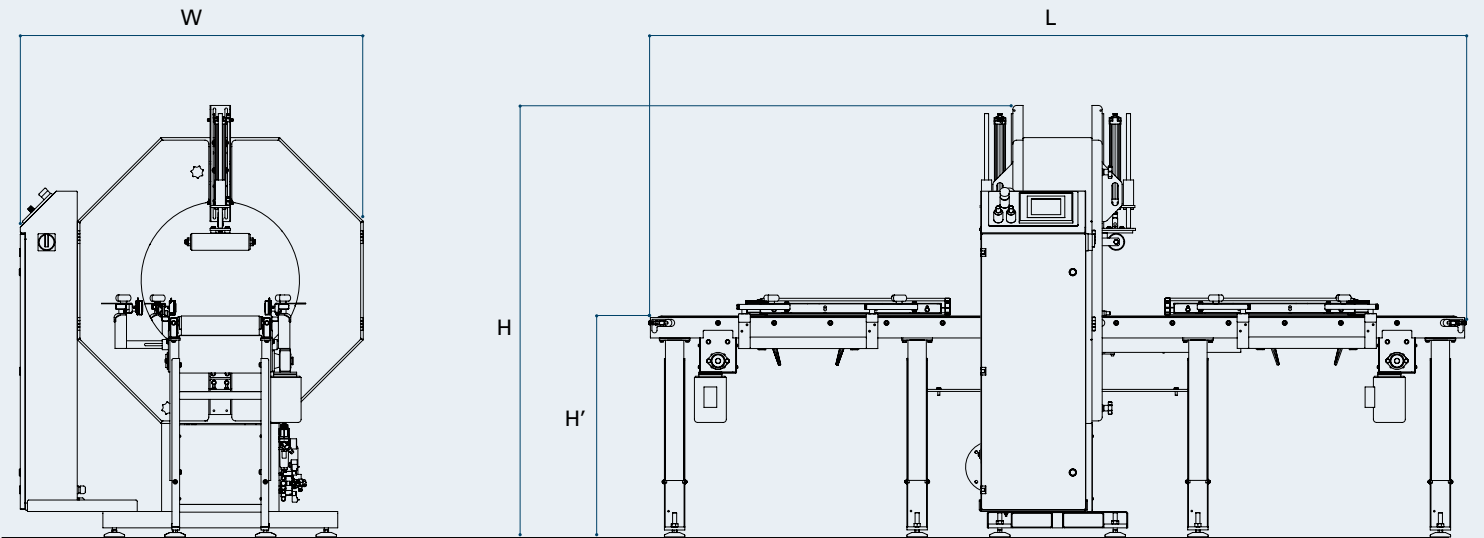

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. ROBOPAC RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND THE ILLUSTRATED ACCESSORIES IN THE PRESENT DOCUMENT.