



West Coast Supplies
Innovative Packaging Solutions

STAINLESS STEEL ROTOPLAT 708

SEMI-AUTOMATIC STRETCH WRAPPER


Ideal for processing, wet or cold operations, our stainless steel Rotoplat 708 stretch wrapper is designed for industries requiring high hygiene like meat, poultry, fish, dairy, beverage and wherever high food safety is essential.

- Save 30-55% on film with Cube Technology
- Rconnect ready
- 65" stainless steel turntable with 28 support bearings
- 4400 lbs. weight capacity
- 110" standard wrap height



NEW Model 708 Stainless Steel

Ideal for Processing, Wet or Cold Operations

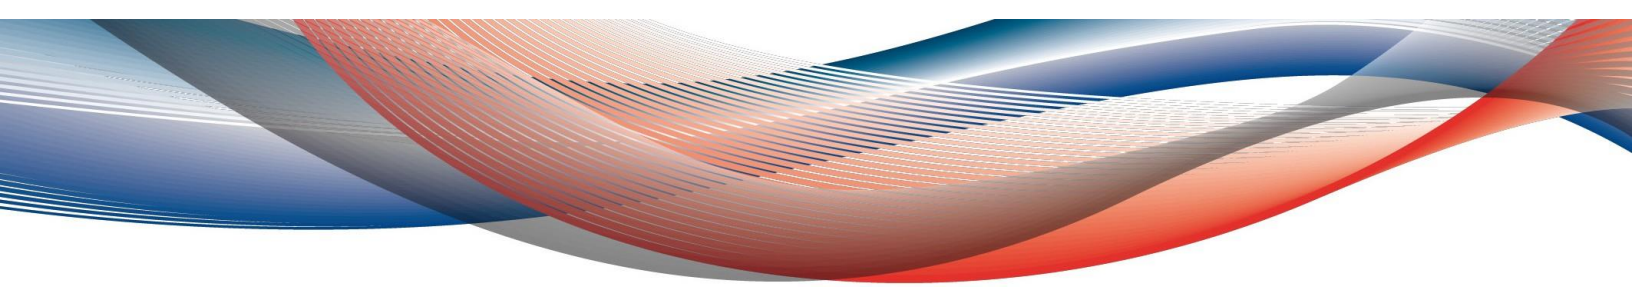



Performance features:



R-CONNECT READY

Developed to provide usage and performance data via the cloud. Utilization drastically reduces downtime by giving you informational transparency, allowing you to connect with your machines remotely to investigate alarms, adjust parameters, & respond promptly.

COLOR TOUCH SCREEN

The high performance 7-inch color touch screen with icons specifically designed and created by Robopac has led to the implementation of the MULTILEVEL CONTROL function.



STAINLESS STEEL FILM ROLL CARRIAGE

Stainless steel version of S Winding Pattern Roll Carriage with Quick Load System that provides 40% more film contact. dual motor pre-stretch system provides you the ability to pre-stretch film from 150% up to 400%

STAINLESS STEEL HD TURNTABLE

100% stainless steel materials used in construction. 65" turntable powered by 1 HP AC motor. The oversize turntable safely and easily accommodates a 40" X 48" with no overhang.



Stainless Steel Rotoplat 708 Specifications

Performance Criteria

Production Speed:

Up to 40 LPH

Turntable Speed:

5 – 12 RPM

Turntable Drive:

1 HP VAC

Load Handling System

Turntable Size:

65" Diameter

Maximum Load Height:

110"

Maximum Load Weight:

4400 lbs.

Film Delivery System

- Containment Force: Multi-Level Variable
- Film Carriage Motor: ½ HP VAC
- Height Sensing: Automatic via photocell
- Film Threading: Patented S-Pattern
- Corner Compensation: Load Cell

Safety Features

- Anti-fall device on carriage
- Pressure activated safety stop on carriage
- CE Compliant, UL, CUL

Utilities

Voltage:

115V, 20 amps, 60 Hz, 1 PH

Warranty:

5 Years