

LP ROTOPLAT SEMI-AUTOMATIC STRETCH WRAPPER

The operator can easily access from every side and load the machine with hand pallet truck via ramp or using a forklift truck.

- Space Saving: Reduced height and base saves 60% space from 3 in. (77mm) to 1.18 in. (30mm).
- Save space thanks to the reduced dimensions of the new ramps.
- Great reliability: New rotation transmission system without chain and patented bearing.
- Reduced height: Only 1.18 in. (30mm) prevents frequent accidental bumps with the forks of the forklift truck for easy loading.
- 2,600 lbs. max weight limit per load





Performance features:



Deliver the exact right amount of film at the exactly the right position with exactly the right containment force.

Reduces film costs 30-55%. Improves load containment. Reduces product damage by 40%.

PVS Carriage

Powered stretch system controlled by two motors. Stretch ratio adjustable from panel board from 150-400%. Force to the load controlled by patented electronic device and adjustable from panel board.



Rconnect, monitor and control performance with remote assistance.



LP Rotoplat Specifications

Performance Criteria

Production Speed:

Up to 40 LPH

Turntable Speed:

5 – 12 RPM

Turntable Drive:

1 HP VAC

Load Handling System

Turntable Size:

65" Diameter

Maximum Load Height:

87" (up to 122" optional)

Maximum Load Weight:

2600 lbs.

Film Delivery System

- Friction Roller Drive (FRD)
- Fixed Gear Pre-Stretch (250%)
- Wrapping Force Variable Electronic
- Standard Film Width 20" (30" option)

Safety Features

- Roll Carriage Safety Stop
- CE Compliant; Anti-fall device

Hardware Voltage:


115V, 20 amps, 60 Hz, 1 PH


NEMA 12 Enclosure:

Standard

Warranty:

5 Years

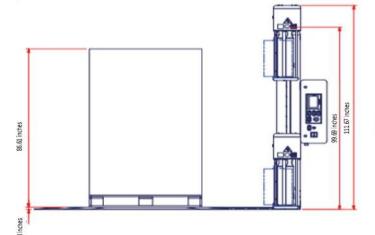

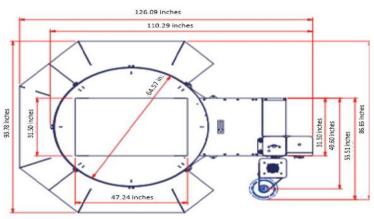

2750 Mercantile Drive, Suite 100 Rancho Cordova, CA 95742 Phone 916-852-6675 Fax 916-852-6676