


Semi-Automatic Stretch Wrapper

# COMPACTA SPG

## HORIZONTAL STRETCH WRAPPER – SUSPENSION PACKAGING FOR SEMI-FINISHED PRODUCTS

**Compacta semi-automatic horizontal rotating ring stretch wrappers are designed for low- to mid-volume production.**

THE COMPACTA  
SUSPENSION PACKAGING  
GRIP (SPG) HORIZONTAL  
STRETCH WRAPPER WAS  
CREATED TO PROVIDE A  
SAFE AND EFFECTIVE  
SOLUTION FOR THE  
PACKAGING OF SEMI-  
FINISHED PRODUCTS  
PLACED ON CARDBOARD.

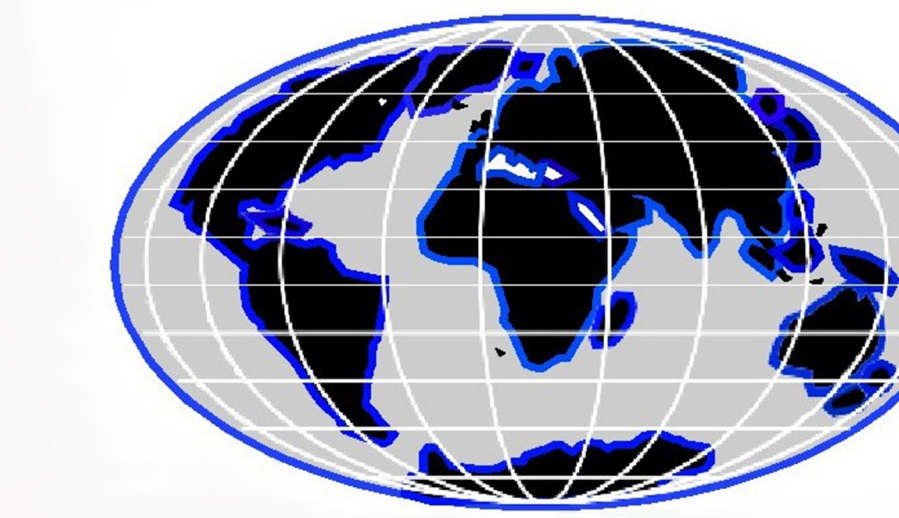


**West Coast Supplies**  
Innovative Packaging Solutions

### PERFORMANCE FEATURES:

#### SPG CONVEYORS

Horizontal motorized roller conveyors: ensure the product's correct entry for optimal wrapping.

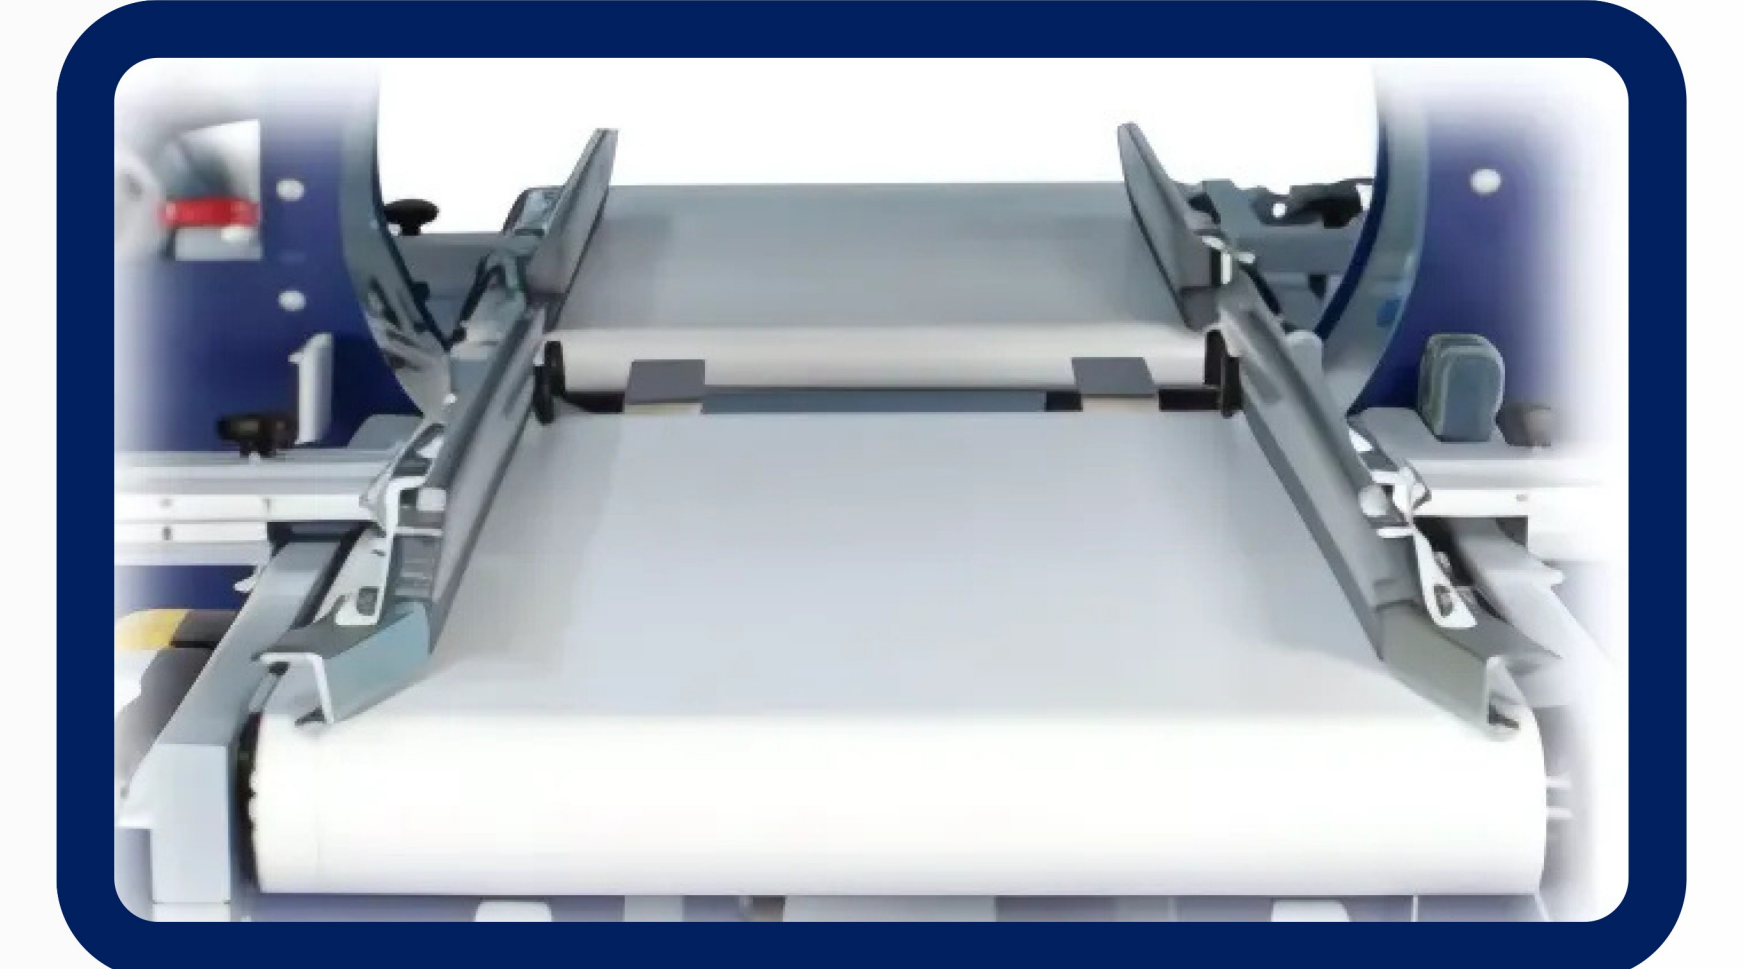

#### COLOR TOUCH SCREEN

Redesigned control panel includes touch screen. The large color screen allows you to create programs quickly and easily. Upgraded memory can now record up to eight different programs.



#### FILM CARRIAGE UNIT

The roll carriage has a direct braking transmission roller and is continuously adjustable. It also simplifies roll loading and film insertion. The roll carriage is equipped with locking and quick release.




#### CUTTING AND CLAMPING UNIT

The automatic highly reliable dual rod clamping and cutting system fully automates the wrapping process.






# COMPACTA SPG SPEC SHEET

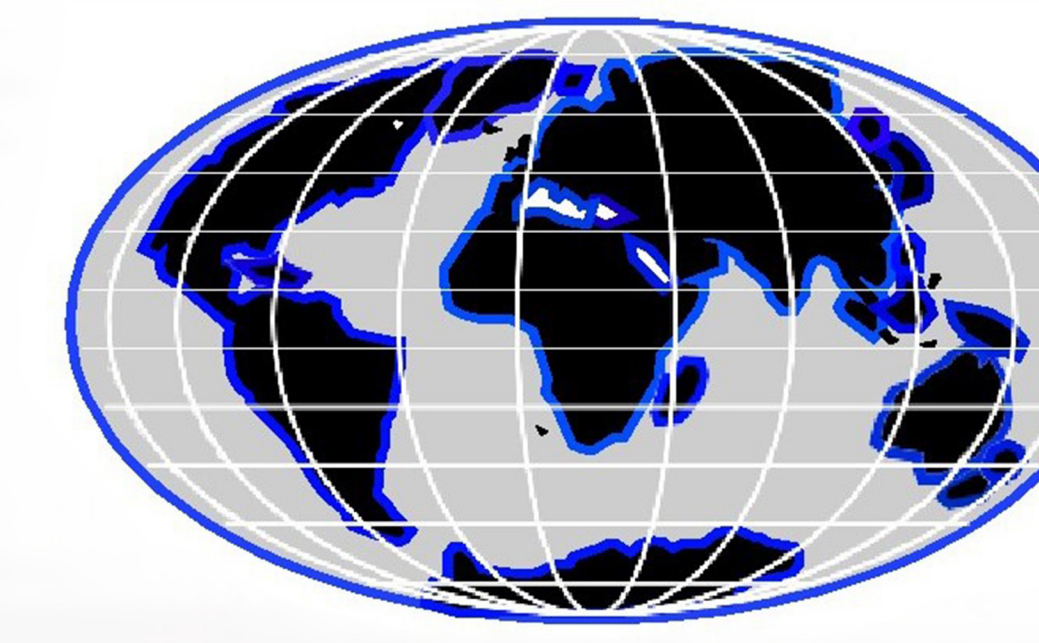

**West Coast Supplies**  
Innovative Packaging Solutions

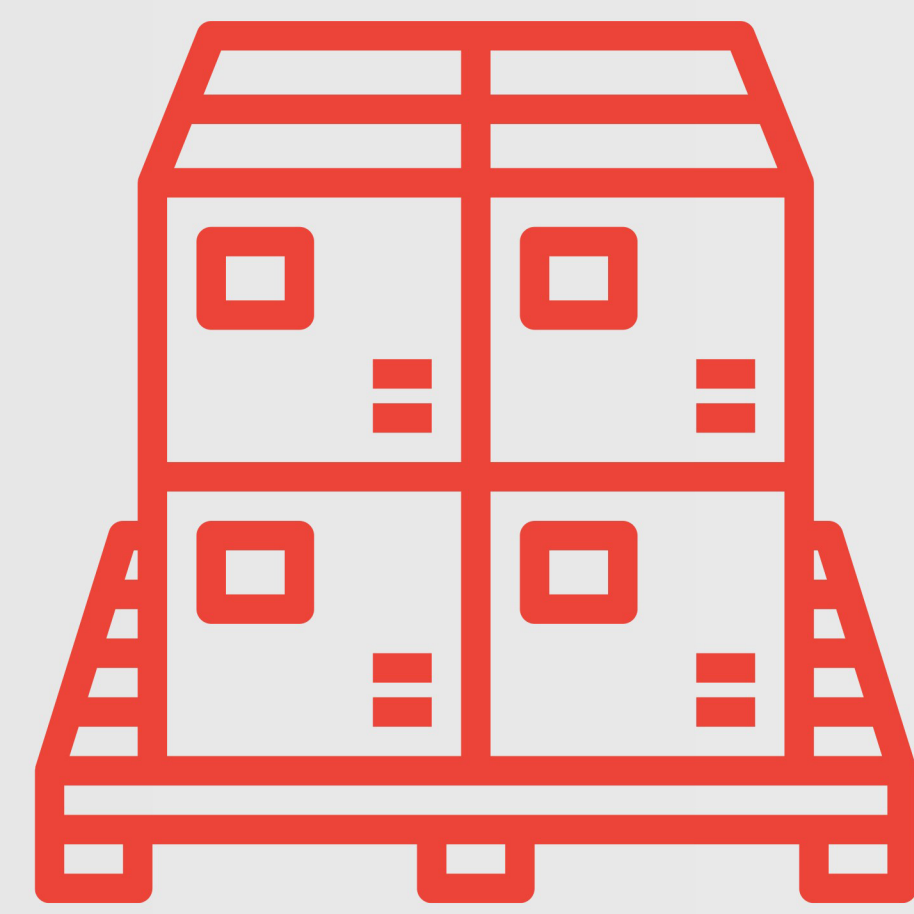

## COMPACTA SPR4:

- **Compacta SPG4:**
- **Belt Driven Rotation**
- **Max. Rotation Speed: 160 RPM**
- **Wrapping Cycle: Continuous or Banding**
- **Manual Top Pressure Unit Infeed and Outfeed: Optional**
- **Pneumatic Cold Cutting and Clamping Unit**
- **Friction Roll: Not included**
- **Constant Film Tensioning: Not applicable**
- **Power Supply Voltage: 110V, 1 phase**
- **Installed Power: 1 HP**
- **Working Pressure: 90 PSI**
- **Film Width: 5 inches**
- **Maximum External Diameter: 8 inches**
- **Core Diameter: 3 inches**

- **Dimensions (SPG4):**
- **Length: 90.2 inches**
- **Width: 49.5 inches**
- **Height: 53 inches**
- **Infeed/Outfeed Table Height: 31.5 inches**
- **Infeed/Outfeed Table Width: 12 inches**

## COMPACTA SPR6:

- **Compacta SPG6:**
- **Belt Driven Rotation**
- **Max. Rotation Speed: 120 RPM**
- **Wrapping Cycle: Continuous or Banding**
- **Manual Top Pressure Unit Infeed and Outfeed: Optional**
- **Pneumatic Cold Cutting and Clamping Unit**
- **Friction Roll: Included**
- **Constant Film Tensioning: Included**
- **Power Supply Voltage: 110V, 1 phase**
- **Installed Power: 1 HP**
- **Working Pressure: 90 PSI**
- **Film Width: 5 inches**
- **Maximum External Diameter: 8 inches**
- **Core Diameter: 3 inches**

- **Dimensions (SPG6):**
- **Length: 90.2 inches**
- **Width: 57.6 inches**
- **Height: 60.8 inches**
- **Infeed/Outfeed Table Height: 31.5–36.2 inches**
- **Infeed/Outfeed Table Width: 19.7 inches**

2750 Mercantile Drive, Suite 100

Rancho Cordova, CA 95742

Phone 916-852-6675 Fax 916-852-6676

Toll Free Phone 800-466-6675 Toll Free Fax 888-852-6676

[www.westcoastsupplies.com](http://www.westcoastsupplies.com)