

Semi-Automatic Stretch Wrapper


ROTOTECH 708 CS

SEMI AUTOMATIC STRETCH WRAPPER

Perfect for heavy and unstable loads. Save time and increase productivity with the automatic cut, clamp and spreading system (CS) which keeps your operator on the fork truck.

CUBE TECHNOLOGY WILL REDUCE YOUR FILM USAGE BY 30% TO 55%, IMPROVE YOUR LOAD CONTAINMENT AND REDUCE POTENTIAL PRODUCT DAMAGE.

OUR HEAVY DUTY CUT, CLAMP AND SPREAD SYSTEM CAN SAVE YOU AN AVERAGE OF 30 SECONDS OF LABOR PER LOAD. FOR THE AVERAGE CUSTOMER, THIS TRANSLATES TO \$60,000 IN LABOR SAVINGS!

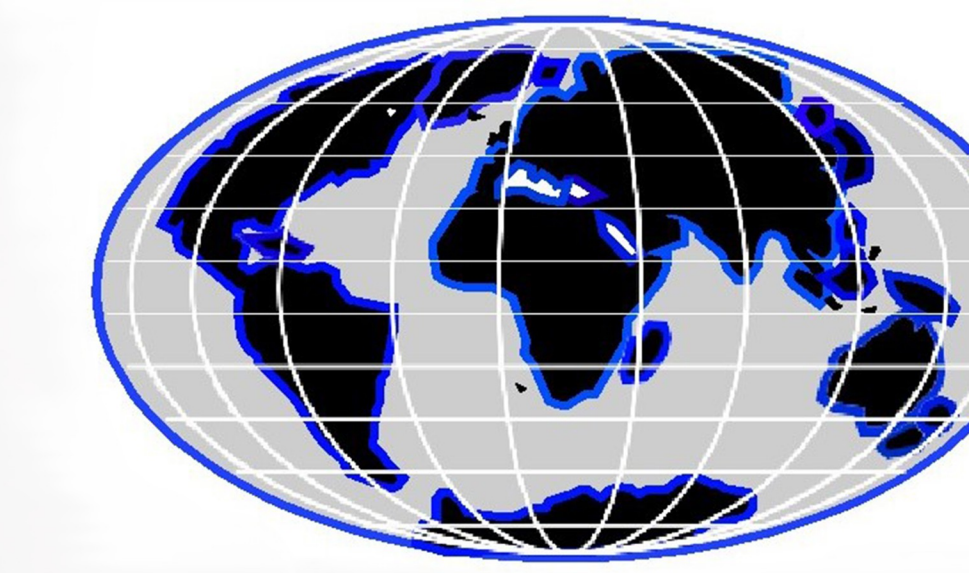

West Coast Supplies
Corporation

Innovative Packaging Solutions

PERFORMANCE FEATURES:

AUTOMATIC FILM CUT, CLAMP AND SPREADING SYSTEM (CS)

The cut, clamp and spreading system ensures a perfect adherence of the final round of film on the wrapped product. The new aluminum clamp controlled by a pneumatic cylinder holds the film clearly and without slippage during cutting.



COLOR TOUCH SCREEN

The control panel has been newly designed, adopting it to a touch screen. Thanks to the large 7" color touch screen this new panel allows you to create programs simply and immediately. It is supplied with more memory to record up to 12 different programs (6+6 with Multilevel Control).




HORIZONTAL ROTATING EXTENDABLE ARM


First adjustable rotating arm machine. Adjust length of rotating arm to wrap products with maximum dimensions 55" x 55". Reduce by adjusting minimum length to wrap products only 16" x 16".



ROTOTECH 708 CS SPEC SHEET

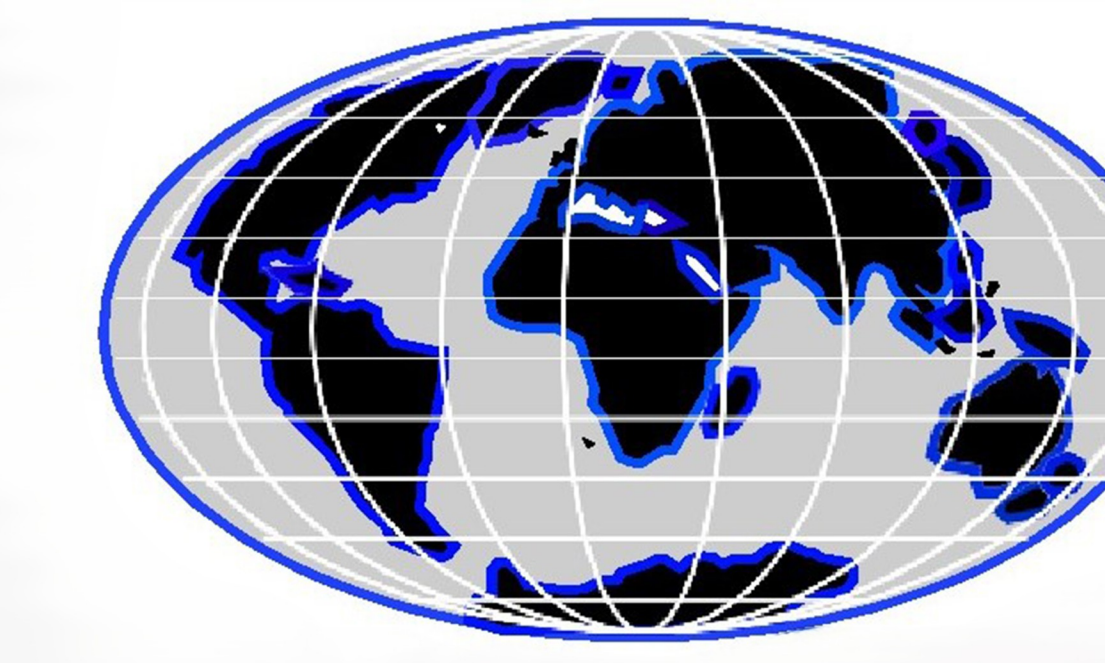

West Coast Supplies
Innovative Packaging Solutions

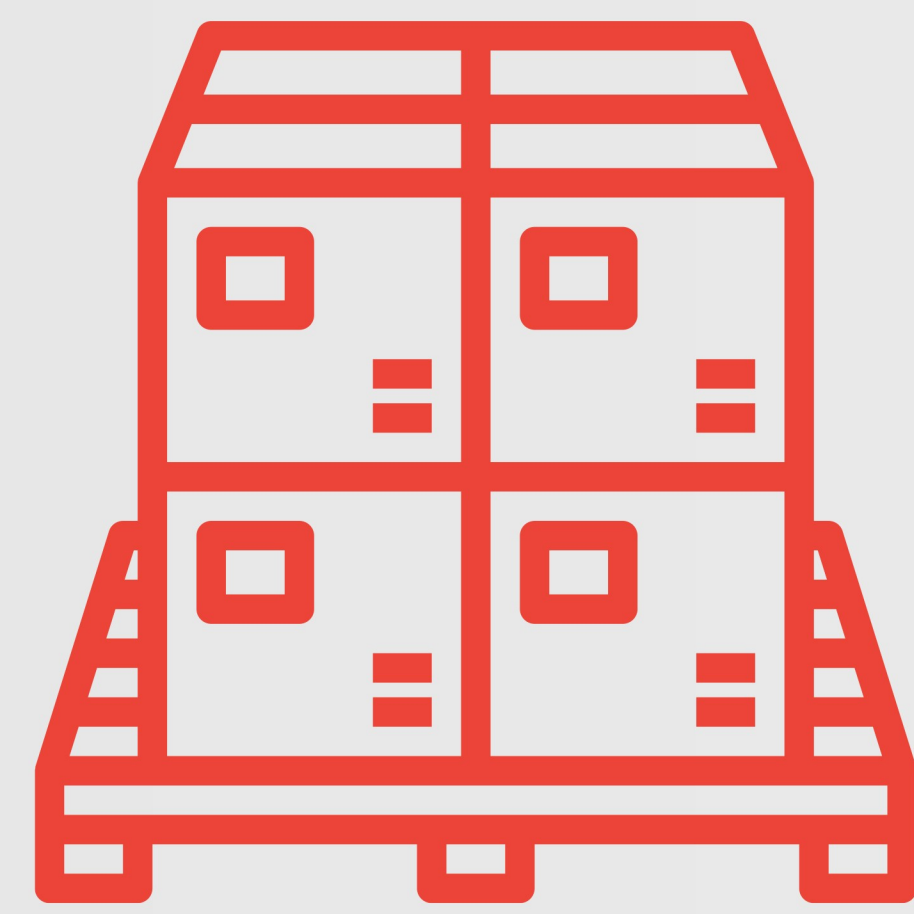

Load Capacity:

-Maximum Load

Dimensions:

-55" W x 55" L x 78" H

Maximum Load Weight:

Unlimited



Film Delivery System

-Power Variable Stretch 150 – 400%

-Containment Force: Load Cell


-Film Carriage Motor: 1/3 HP VAC

-Height Sensing: Automatic photo eye

-Film threading: patented S-Pattern

-Corner Compensation: Load Cell

-Standard Film Width – 20" (30" option)

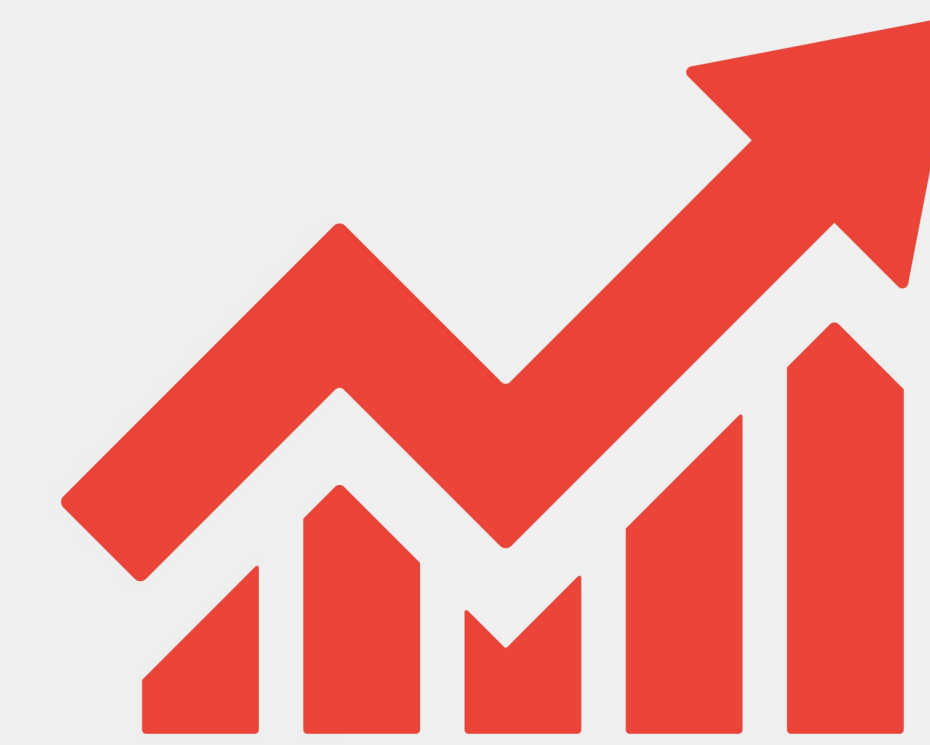

Performance Criteria

-Production Speed:

Up to 35 LPH

-Wrap Arm Speed:

12 RPM

-Rotary Arm Drive:

1 HP VAC



Utility Requirements

-Voltage: 115V, 20

AMP, 60 Hz, 1 PH

Air: 90 PSI



Safety Features

-Safety Bumper Warning Light

-Safety Alarm

-CE Compliant, UL, CUL

-Touch screen HMI control panel

-12 programmable wrapping menus



2750 Mercantile Drive, Suite 100

Rancho Cordova, CA 95742

Phone 916-852-6675 Fax 916-852-6676

Toll Free Phone 800-466-6675 Toll Free Fax 888-852-6676

www.westcoastsupplies.com