




West Coast Supplies
Innovative Packaging Solutions

COMPACTA SPG

HORIZONTAL ROTATING RING STRETCH WRAPPERS

The Compacta Suspension Packaging Grip (SPG) horizontal stretch wrapper was created to provide a safe and effective solution for the packaging of semi-finished products placed on cardboard.

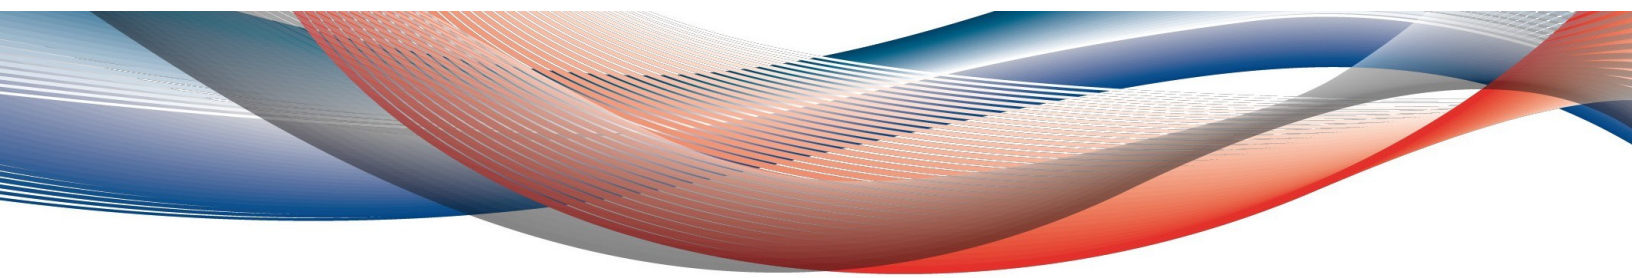



Performance features:



The Compacta SPG features vertically adjustable infeed and outfeed with motorized belt conveyors and adjustable idle roller side guides. Side guides are angled to reduce vibration during the wrapping process. This machine is ideal for lighter products being wrapped with thin substrates.



Angled idle guide roller option for 0.12" base



Horizontal idle guide roller option for 0.12" base

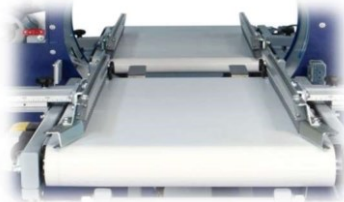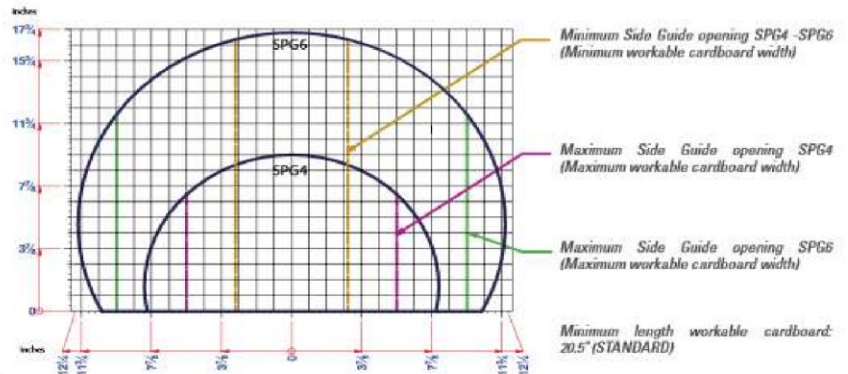

SPG CONVEYORS

Horizontal motorized roller conveyors: ensure the product's correct entry for optimal wrapping.


COLOR TOUCH SCREEN

Redesigned control panel includes touch screen. The large color screen allows you to create programs quickly and easily. Upgraded memory can now record up to eight different programs.



FILM CARRIAGE UNIT

The roll carriage has a direct braking transmission roller and is continuously adjustable. It also simplifies roll loading and film insertion. The roll carriage is equipped with locking and quick release.



CUTTING AND CLAMPING UNIT

The automatic highly reliable dual rod clamping and cutting system fully automates the wrapping process.



Compacta SPG

Machine	Compacta SPG4	Compacta SPG6
Belt Driven Rotation	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Max. Rotation Speed (RPM)	160	120
Wrapping Cycle	Continuous or Banding	Continuous or Banding
Manual Top Pressure Unit Infeed and Outfeed	Optional	Optional
Pneumatic Cold Cutting and Clamping Unit	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Friction Roll	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Constant Film Tensioning	N/A	<input checked="" type="checkbox"/>
Power Supply Voltage	110 V 1 phase	110 V 1 phase
Installed Power	1 HP	1 HP
Working Pressure: 90 PSI	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Film Width (in.)	5"	5"
Maximum Ext. Dia. (in.)	8"	8"
Core Diameter (in)	3"	3"

Compacta SPG4	Compacta SPG6
90.2"	90.2"
49.5"	57.6"
53"	60.8"
31.5"	31.5"-36.2"
12"	19.7"

2750 Mercantile Drive, Suite 100
 Rancho Cordova, CA 95742

Phone 916-852-6675 Fax 916-852-6676

www.westcoastsupplies.com